

SLIDING EQUIPMENT SHELF INSTALLATION INSTRUCTIONS

PRE-INSTALLATION:

1. THE EQUIPMENT RACK MUST BE DOUBLE SIDED.
2. RACK MUST BE BOLTED SECURELY TO THE FLOOR.
3. IF RACK IS NOT SUPPORTED AT THE TOP, NO MORE THAN ONE SHELF AT A TIME SHOULD BE EXTENDED.
4. MAXIMUM LOAD FOR THIS SHELF IS 100 POUNDS.
5. INSTALLATION WILL REQUIRE TWELVE 12-24 MOUNTING SCREWS.
6. THE FRONT AND REAR MOUNTING FLANGES HAVE THREE MOUNTING SLOTS EACH - ALL 12 MUST BE USED.

INSTALLATION:


1. IF THERE IS ENOUGH OPEN RACK SPACE, THE SHELF SHOULD BE TILTED SIDEWAYS AND POSITIONED BETWEEN THE RACK CHANNELS, THEN ROTATED BACK TO STRADDLE THE RACK CHANNELS.
2. THE MOUNTING SCREWS MAY BE INSTALLED NOW.

ALTERNATE INSTALLATION:


1. IF THERE IS NOT ENOUGH OPEN RACK SPACE TO TILT THE SHELF, THE MOUNTING BRACKETS MUST BE REMOVED FROM THE SHELF AND MOUNTED SEPARATELY. (THIS IS NOT DIFFICULT)
DO NOT REMOVE ANY SCREWS FROM THE SLIDES.
2. RAISE THE LOCK-IN LATCHES (SEE ILLUSTRATION 1) AND SLIDE THE MOUNTING BRACKETS OUT, AWAY FROM THE SHELF, UNTIL THEY LOCK EXTENDED (SEE 2).
3. RAISE THE LOCK-OUT LATCH (SEE ILLUSTRATION 2), AND PULL THE MOUNTING BRACKET AWAY FROM THE SHELF (SEE 3).
4. REPEAT ON OPPOSITE SIDE.
5. MOUNT BRACKETS ONTO RACK CHANNELS, LOOSELY, AND RETURN SHELF TO SLIDES THEN TO CLOSED POSITION. TIGHTEN THE MOUNTING SCREWS.




CHATSWORTH PRODUCTS, INC.

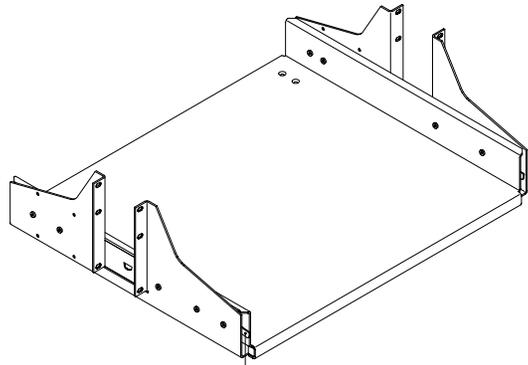

LOCK-IN
LATCH

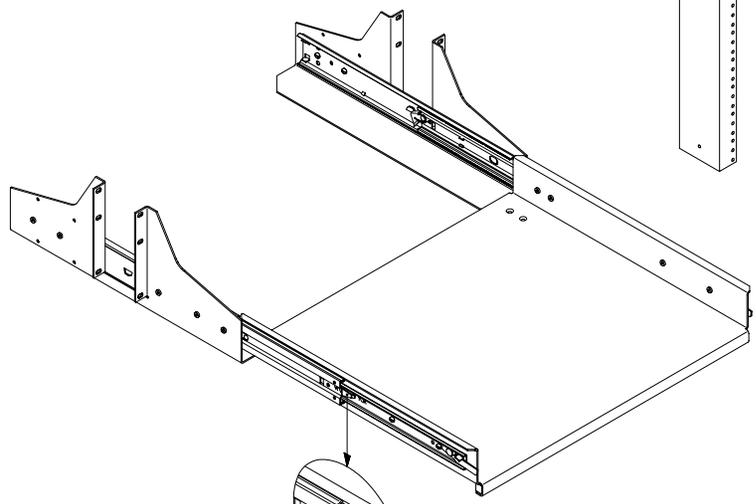

LOCK-OUT
LATCH

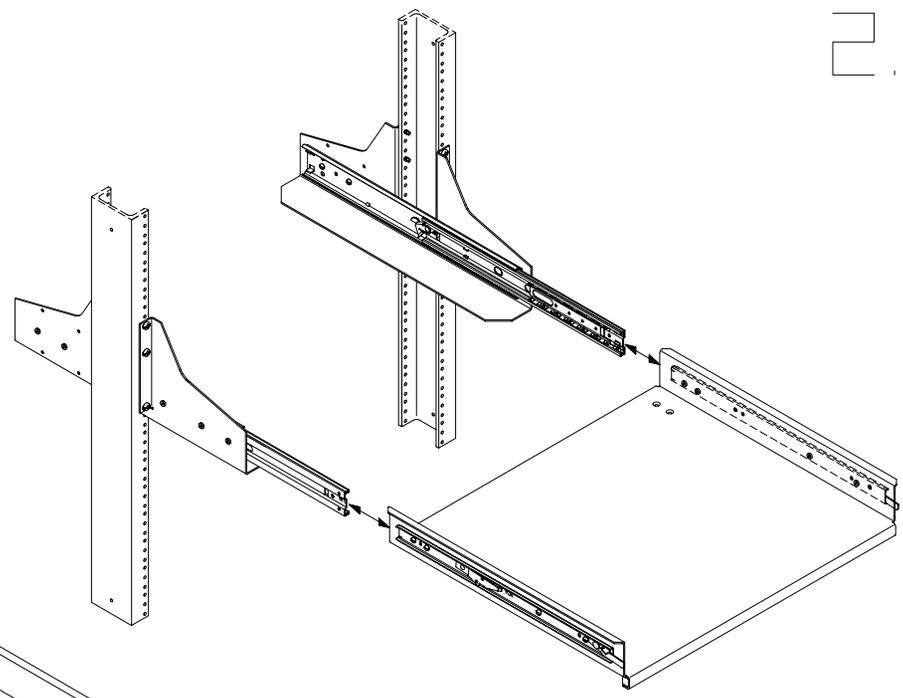

2

3.

 CHATSWORTH PRODUCTS, INC.

SLIDING EQUIPMENT SHELF, INSTAL. INSTR.

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO CHATSWORTH PRODUCTS, INC. ANY REPRODUCTION DISCLOSURE OR USE OF THIS DRAWING IS EXPRESSLY FORBIDDEN EXCEPT AS AGREED TO IN WRITING BY CHATSWORTH PRODUCTS, INC.