

# Installation Instructions

## ADJUSTABLE SERVERRACK AND QUADRARACK EQUIPMENT SUPPORT RAILS

### Safety Information



**WARNING:** Improper use of this product may lead to serious injury or death. Read and understand all instructions for proper installation and use of this product.

### Intended Use

Maximum load rating of the support rails is 200 lb.

### Tools Required


13mm socket wrench

### Included Hardware

8 each  
8 mm x  
16 mm Bolt



8 each  
8mm  
Flange Nut




4 each  
1/2" Flat  
Washer



### Assembly Sequence

1. Center the long bracket between the front and rear channels.  
Note: depending on the rack depth the bracket may need to be offset either to the front or rear of the rack. Position a short bracket onto the long bracket with the end as close to the channel front flange as possible while aligning the mounting holes. Install a bolt through the short and long bracket holes and then through the channel hole; the bolt head should be on the inside of the rack. Install nut onto bolt.
2. Install a second bolt through the short and long bracket holes at the hole closest to the opposite end of the short bracket. Install a washer and nut onto bolt.

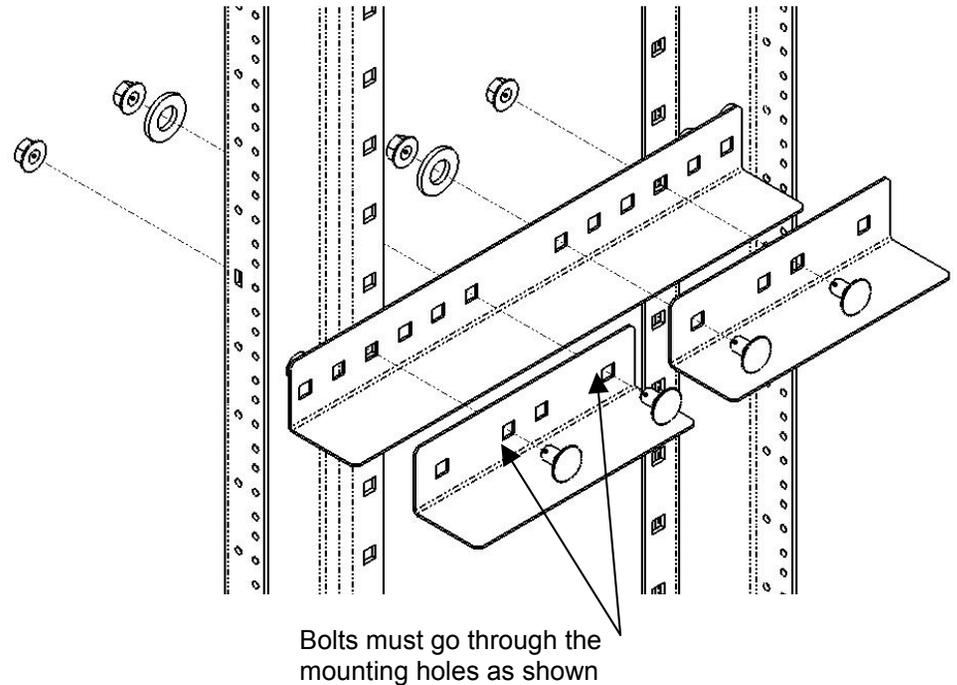

CHATSWORTH PRODUCTS, INC.

IIS-715235, 01/06/10, Rev. 2, CPI/B Krietzman

800-834-4969 (USA & Canada) • [www.chatsworth.com](http://www.chatsworth.com) • [techsupport@chatsworth.com](mailto:techsupport@chatsworth.com)

For international phone numbers, see our website or contact CPI Tech Support.

*This drawing contains proprietary and confidential information and is protected by U.S. and international law. Unauthorized reproduction, disclosure or use of the drawing or the information therein is expressly forbidden except as agreed to in writing by Chatsworth Products, Inc.*

