Installation Instructions

THINLINE II FAN KIT

Safety Information



WARNING: DISCONNECT ELECTRICAL POWER BEFORE WORKING ON OR INSTALLING FAN ASSEMBLIES.



WARNING: NEVER WORK ALONE WHEN POTENTIALLY HAZARDOUS CONDITIONS EXIST AND NEVER INSTALL DAMAGED EQUIPMENT.



WARNING: HAZARDOUS MOVING PARTS. KEEP AWAY FROM ROTATING FAN BLADES.

Intended Use The Thinline II Fan Kit exhausts hot air from the enclosure.


Tools Required T20 Torx Screwdriver ¼" box wrench

Fan Kit (P/N 13501) Parts List 1 DC Thermistor Controlled Fan (92mm or 120mm) 1 12VDC Wall Mount Power Supply

Assembly Sequence

Note: The screws, nuts and lower fan grill used to attach fan are provided with wall mount unit, and must be re-used when installing fan kit.

- 1. Remove 8-32 nuts that attach grill to bottom of wall mount unit.
- 2. Place fan as shown so that 8-32X1/2 Torx screws pass through lower grill and fan.
- 3. Attach 8-32 nuts as shown and tighten Torx screws.
- 4. Plug provided 12VDC power supply into receptacle on fan and appropriate power source.

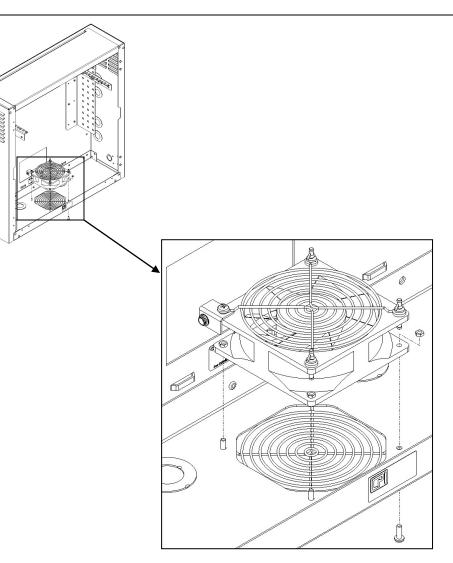



IIS-713051, 02/20/15, Rev. 1, CPI/JAG

800-834-4969 (USA & Canada) • www.chatsworth.com • techsupport@chatsworth.com For international phone numbers, see our website or contact CPI Tech Support.

This drawing contains proprietary and confidential information and is protected by U.S. and international law. Unauthorized reproduction, disclosure or use of the drawing or the information therein is expressly forbidden except as agreed to in writing by Chatsworth Products, Inc.